


# SR820 THRU SR8A0

## SCHOTTKY BARRIER RECTIFIER

Reverse Voltage - 20 to 100 Volts Forward Current - 8.0 Amperes

### TO-220AC

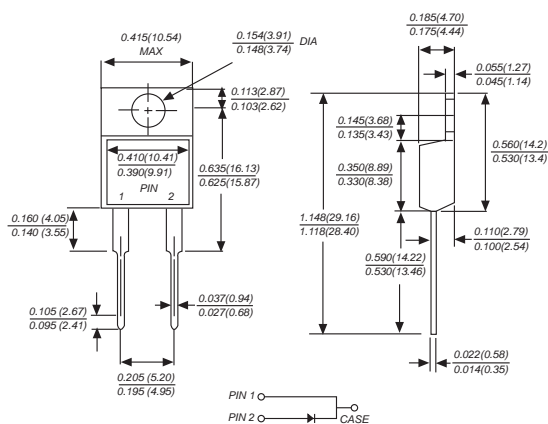

### FEATURES

- ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆ Construction utilizes void-free molded plastic technique
- ◆ Low reverse leakage
- ◆ High forward surge current capability
- ◆ High temperature soldering guaranteed: 250°C, 0.25" (6.35mm) from case for 10 seconds

### MECHANICAL DATA

**Case:** TO-220AC molded plastic body  
**Terminals:** Leads solderable per MIL-STD-750, Method 2026  
**Polarity:** As marked  
**Mounting Position:** Any  
**Weight:** 0.064 ounce, 1.81 grams

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.  
 Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

	SYMBOLS	SR 820	SR 830	SR 840	SR 845	SR 850	SR 860	SR 870	SR 880	SR 890	SR 8A0	UNITS
Maximum repetitive peak reverse voltage	$V_{RRM}$	20	30	40	45	50	60	70	80	90	100	VOLTS
Maximum RMS voltage	$V_{RMS}$	14	21	28	32	35	42	49	56	63	70	VOLTS
Maximum DC blocking voltage	$V_{DC}$	20	30	40	45	50	60	70	80	90	100	VOLTS
Maximum average forward rectified current (see fig.1)	$I_{(AV)}$	8.0										Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	$I_{FSM}$	150.0										Amps
Maximum instantaneous forward voltage at 8.0A	$V_F$	0.65			0.75		0.85					Volts
Maximum DC reverse current at rated DC blocking voltage $T_A=25^\circ\text{C}$ $T_A=100^\circ\text{C}$	$I_R$	15.0			50.0						mA	
Typical junction capacitance (NOTE 1)	$C_J$	300			250						pF	
Typical thermal resistance (NOTE 2)	$R_{\theta JC}$	3.0										°C/W
Operating junction temperature range	$T_J$	-65 to +125					-65 to +150					°C
Storage temperature range	$T_{STG}$	-65 to +150										°C

**Note:** 1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.  
 2. Thermal resistance from junction to case

# RATINGS AND CHARACTERISTIC CURVES SR820 THRU SR8A0

